



## Chapter 3: Branch Connections



## Connecting Networks

Cisco | Networking Academy®  
Mind Wide Open™



# Chapter 3- Sections & Objectives

- 3.1 Remote Access Connections
  - Select broadband remote access technologies to support business requirements.
- 3.2 PPPoE
  - Configure a Cisco router with PPPoE.
- 3.3 VPNs
  - Explain how VPNs secure site-to-site and remote access connectivity.
- 3.4 GRE
  - Implement a GRE tunnel.
- 3.5 eBGP
  - Implement eBGP in a single-homed remote access network.



## 3.1 Remote Access Connections




Cisco | Networking Academy®  
Mind Wide Open™



## Remote Access Connections

# Broadband Connections

- The cable system uses a coaxial cable that carries radio frequency (RF) signals across the network.
- A headend CMTS communicates with CMs located in subscriber homes.
- The HFC network is a mixed optical-coaxial network in which optical fiber replaces the lower bandwidth coaxial cable.

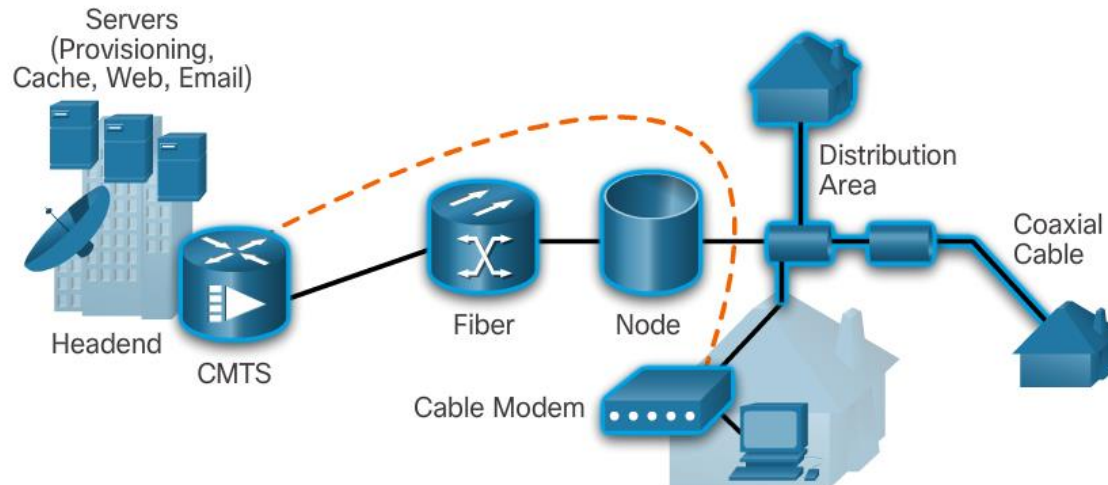




# Remote Access Connections

## Broadband Connections

- A **Digital Subscriber Line (DSL)** is a means of providing high-speed connections over installed copper wires.
- The two important components are the **DSL transceiver** and the **DSLAM**
- The advantage that DSL has over cable technology is that **DSL is not a shared medium**. Each user has a separate direct connection to the DSLAM.

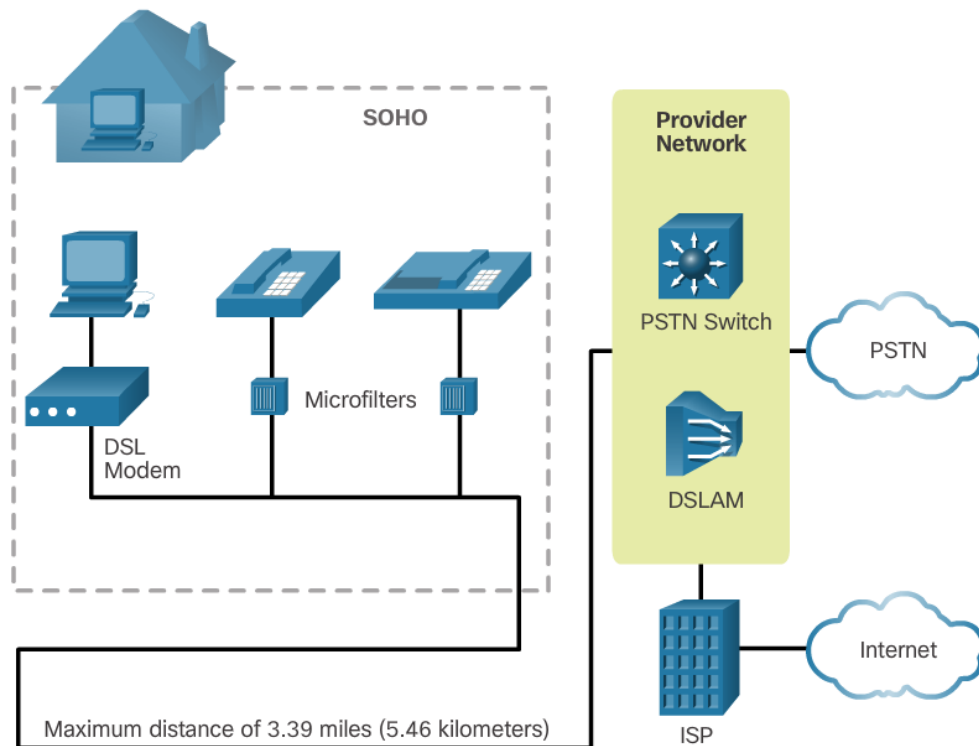



## Remote Access Connections

# Broadband Connections

- Developments in **broadband wireless technology** are increasing wireless availability through three main technologies:
  - **Municipal Wi-Fi** - Most municipal wireless networks use a mesh of interconnected access points. Each access point is in range and can communicate with at least two other access points. The mesh blankets a particular area with radio signals.
  - **Cellular/mobile** - Mobile phones use radio waves to communicate through nearby cell towers. Cellular/mobile broadband access consists of various standards.
  - **Satellite Internet** - Satellite Internet services are used in locations where land-based Internet access is not available, or for temporary installations that are mobile. Internet access using satellites is available worldwide.



## Remote Access Connections

# Select a Broadband Connection

- Each broadband solution has advantages and disadvantages.
- Some factors to consider in making a decision include:
  - **Cable** - Bandwidth is shared by many users, upstream data rates are often slow during high-usage hours in areas with over-subscription.
  - **DSL** - Limited bandwidth that is distance sensitive (in relation to the ISP's central office), upstream rate is proportionally quite small compared to downstream rate.
  - **Fiber-to-the-Home** - Requires fiber installation directly to the home.
  - **Cellular/Mobile** - Coverage is often an issue, even within a SOHO where bandwidth is relatively limited.
  - **Wi-Fi Mesh** - Most municipalities do not have a mesh network deployed; if it is available and the SOHO is in range, then it is a viable option.
  - **Satellite** - Expensive, limited capacity per subscriber; often provides access where no other access is possible.



## 3.2 Varieties of Spanning Tree Protocols



Cisco | Networking Academy®  
Mind Wide Open™






# PPPoE

## PPPoE Overview

- **PPP can be used on all serial links** including those links created with dial-up analog and ISDN modems.
  - PPP supports the ability to assign IP addresses to remote ends of a PPP link.
  - PPP supports CHAP authentication.
  - **Ethernet links do not natively support PPP. PPP over Ethernet (PPPoE) provides a solution to this problem. PPPoE creates a PPP tunnel over an Ethernet connection.**

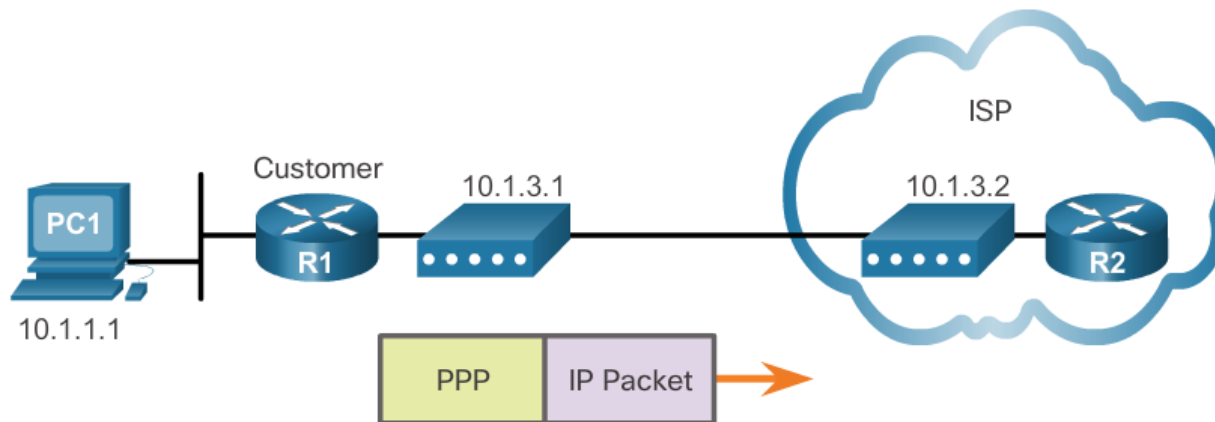



# PPPoE

## Implement PPPoE

- PPPoE Configuration
  - The dialer interface is created using **the interface dialer number** command.
  - The **PPP CHAP configuration usually defines one-way authentication**; therefore, the ISP authenticates the customer.
  - **The physical Ethernet interface that connects to the DSL modem is then enabled with the command pppoe enable.**
  - The dialer interface is linked to the Ethernet interface with the **dialer pool** and **pppoe-client** commands, using the same number.
  - The maximum transmission unit (MTU) should be set down to 1492, versus the default of 1500, to accommodate the PPPoE headers.
- PPPoE Verification
  - The **show ip interface brief** command is issued to verify the IPv4 address automatically assigned to the dialer interface by the ISP router.
  - **The show interface dialer** command verifies the MTU and PPP encapsulation configured on the dialer interface.
  - The **show pppoe session** command is used to display information about currently active PPPoE sessions.
  - The Ethernet MAC addresses can be verified by using the **show interfaces** command on each router.




# PPPoE

## Implement PPPoE

### ■ PPPoE Troubleshooting

- Verify PPP negotiation using the **debug ppp negotiation** command.
- Re-examine the output of the **debug ppp negotiation** command.
- PPPoE supports an MTU of only 1492 bytes in order to accommodate the additional 8-byte PPPoE header.
- The **ip tcp adjust-mss max-segment-size** interface command adjusts the MSS value during the TCP 3-way handshake.

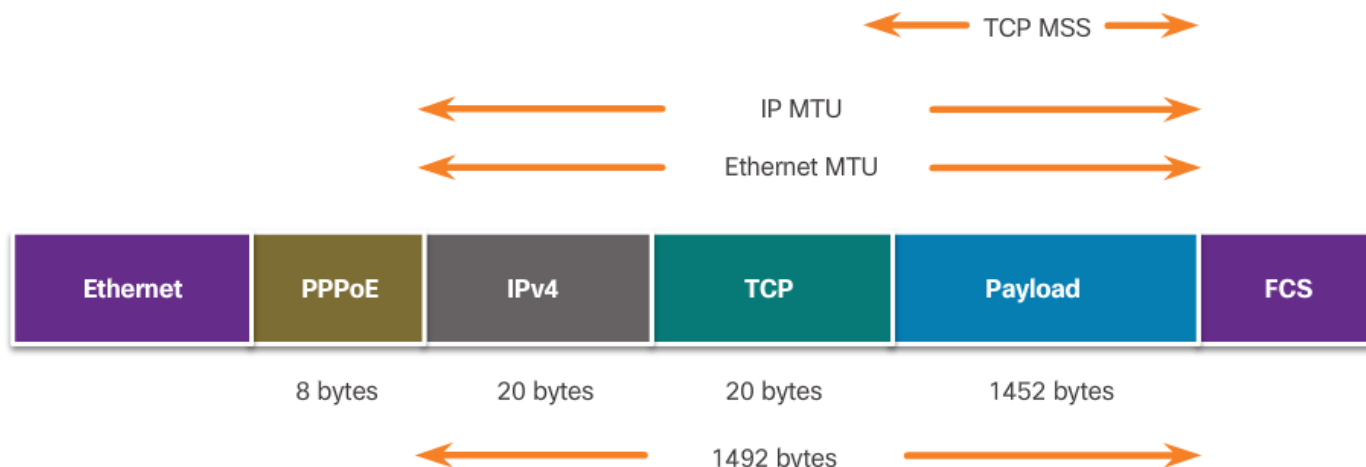



## 3.3 VPNs



Cisco | Networking Academy®  
Mind Wide Open™



# VPNs

## Fundamentals of VPNs

### ■ Introducing VPNs

- Organizations use VPNs to create an end-to-end private network connection over third-party networks, such as the Internet.
- Today, a secure implementation of VPN with encryption, such as IPsec VPNs, is what is usually meant by virtual private networking.
- To implement VPNs, a VPN gateway is necessary. The VPN gateway could be a router, a firewall, or a Cisco Adaptive Security Appliance (ASA).

### ■ Benefits of VPNs

- Cost savings
- Scalability
- Compatibility with broadband technology
- Security




# VPNs

## Types of VPNs


### Site-to-Site

- Site-to-site VPNs connect entire networks to each other, for example, they can connect a branch office network to a company headquarters network.

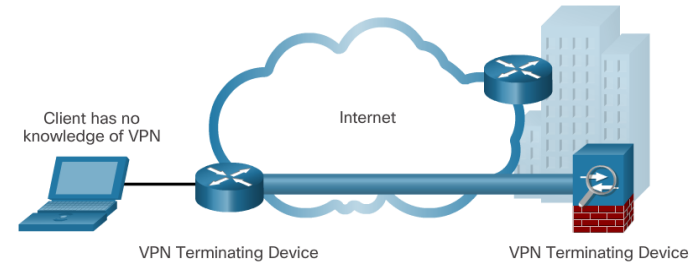


### Remote Access

- Remote-access VPNs are used to connect individual hosts that must access their company network securely over the Internet.

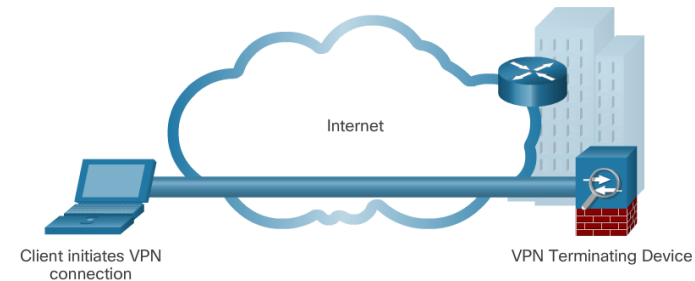

### DMVPN

- Dynamic Multipoint VPN (DMVPN) is a Cisco software solution for building multiple VPNs in an easy, dynamic, and scalable manner.

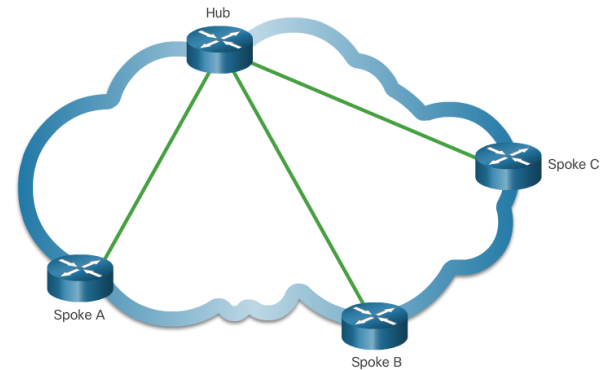



## 3.4 GRE



Cisco | Networking Academy®  
Mind Wide Open™



# GRE


## GRE Overview

### GRE Introduction

- **Generic Routing Encapsulation (GRE) is designed to manage the transportation of multiprotocol and IP multicast traffic between two or more sites, that may only have IP connectivity.**

### GRE Characteristics

- **IP tunneling using GRE enables network expansion across a single-protocol backbone environment.**

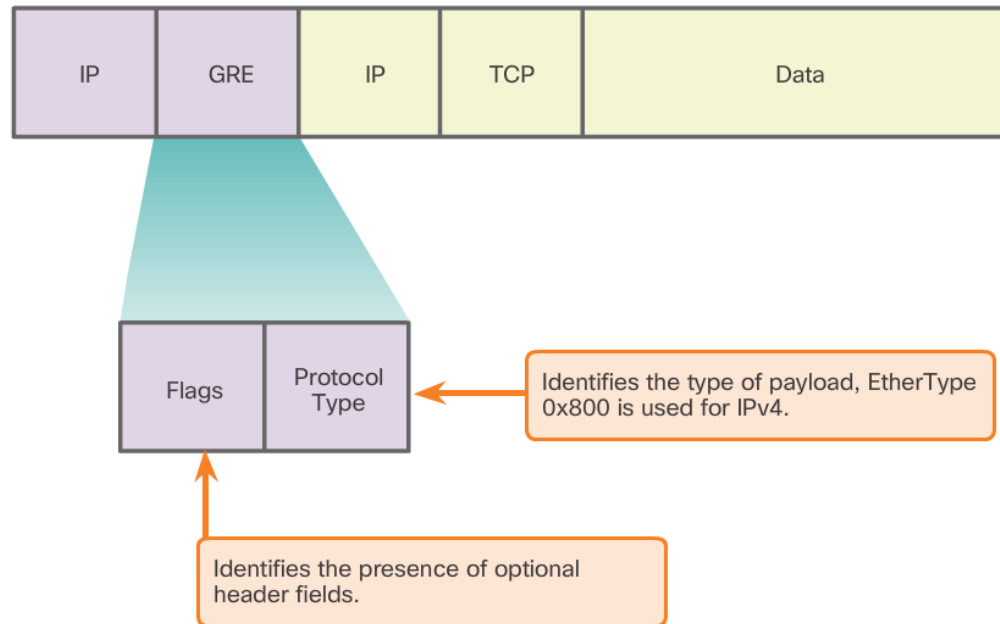





# GRE

## Implement GRE

- There are five steps to configuring a GRE tunnel:
  - **Step 1.** Create a tunnel interface using the **interface tunnel number** command.
  - **Step 2.** **Configure an IP address** for the tunnel interface. This is normally a private IP address.
  - **Step 3.** **Specify the tunnel source IP address.**
  - **Step 4.** **Specify the tunnel destination IP address.**
  - **Step 5.** (Optional) Specify GRE tunnel mode as the tunnel interface mode.

Command	Description
<code>tunnel mode gre ip</code>	Specifies that the mode of the tunnel interface is GRE over IP.
<code>tunnel source ip_address</code>	Specifies the tunnel source address.
<code>tunnel destination ip_address</code>	Specifies the tunnel destination address.
<code>ip address ip_address mask</code>	Specifies the IP address of the tunnel interface.



# GRE

## Implement GRE

- Verify GRE
  - To determine whether the tunnel interface is up or down, use the **show ip interface brief** command.
  - To verify the state of a GRE tunnel, use the **show interface tunnel** command.
  - Verify that an OSPF adjacency has been established over the tunnel interface using the **show ip ospf neighbor** command.
  
- Troubleshoot GRE
  - Use the **show ip interface brief** command on both routers to verify that the tunnel interface is up and configured with the correct IP addresses for the physical interface and the tunnel interface.
  - Use the **show ip ospf neighbor** command to verify neighbor adjacency.
  - Use **show ip route** to verify that networks are being passed between the two routers



## 3.5 eBGP



Cisco | Networking Academy®  
Mind Wide Open™



# eBGP

## BGP Overview


- IGP and EGP
  - Interior Gateway Protocols (IGPs) are used to exchange routing information within a company network or an autonomous system (AS).
  - Exterior Gateway Protocols (EGPs) are used for the exchange of routing information between autonomous systems.
- eBGP and iBGP
  - External BGP (eBGP) is the routing protocol used between routers in different autonomous systems.
  - Internal BGP (iBGP) is the routing protocol used between routers in the same AS.
- This course focuses on eBGP only.



# eBGP

## BGP Design Considerations

- When to use BGP
  - The use of BGP is most appropriate when an AS has connections to multiple autonomous systems.
  - BGP should not be used when at least one of the following conditions exist:
    - There is a single connection to the Internet or another AS. This is known as single-homed.
    - When there is a limited understanding of BGP.

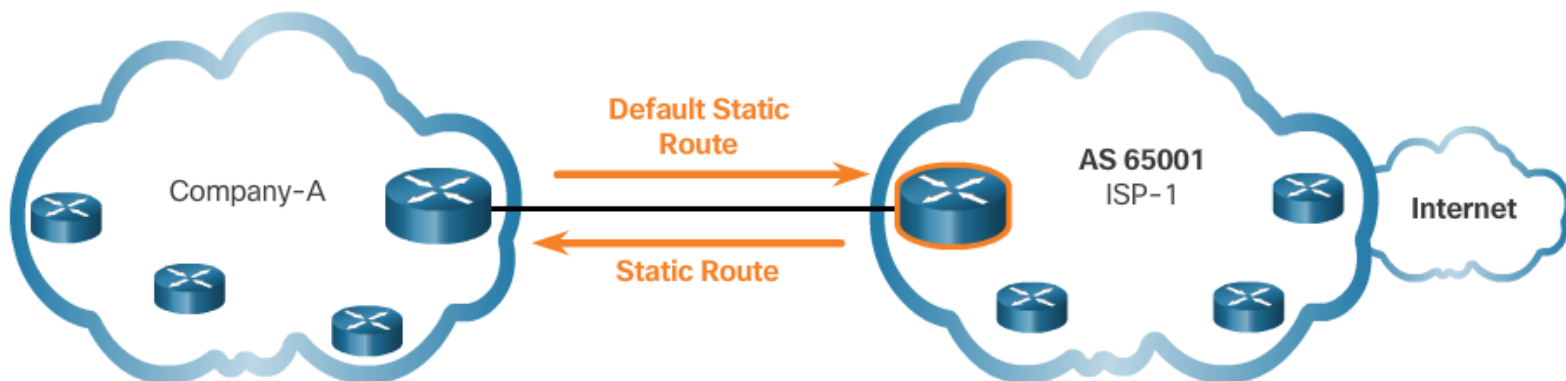



## eBGP

# BGP Design Considerations

### ■ BGP Options

- There are three common ways an organization can choose to implement BGP in a multi-homed environment:
  - **Default Route Only** - This is the simplest method to implement BGP. However, because the company only receives a default route from both ISPs, sub-optimal routing may occur.
  - **Default Route and ISP Routes** - This option allows Company-A to forward traffic to the appropriate ISP for networks advertised by that ISP.
  - **All Internet Routes** - Because Company-A receives all Internet routes from both ISPs, Company-A can determine which ISP to use as the best path to forward traffic for any network. Although this solves the issue of sub-optimal routing, the Company-A's BGP router must contain all Internet routes.



# eBGP

## BGP Branch Configuration

- BGP Configuration Commands
  - There are three steps to implement eBGP:
    - **Step 1: Enable BGP routing.**
    - **Step 2: Configure BGP neighbor(s) (peering).**
    - **Step 3: Advertise network(s) originating from this AS.**

Command	Description
Router(config)# <b>router bgp</b> <i>as-number</i>	Enables a BGP routing process, and places the router in router configuration mode.
Router(config-router)# <b>neighbor</b> <i>ip-address</i> <b>remote-as</b> <i>as-number</i>	Specifies a BGP neighbor. The as-number is the neighbor's AS number.
Router(config-router)# <b>network</b> <i>network-address</i> [ <b>mask</b> <i>network-mask</i> ]	Advertises a network address to an eBGP neighbor as being originated by this AS. The network-mask is the subnet mask of the network.




# eBGP

## BGP Branch Configuration

- Verify eBGP
  - Three commands can be used to verify eBGP

Command	Description
Router# <code>show ip route</code>	Verify routes advertised by the BGP neighbor are present in the IPv4 routing table.
Router# <code>show ip bgp</code>	Verify that received and advertised IPv4 networks are in the BGP table.
Router# <code>show ip bgp summary</code>	Verify IPv4 BGP neighbors and other BGP information.

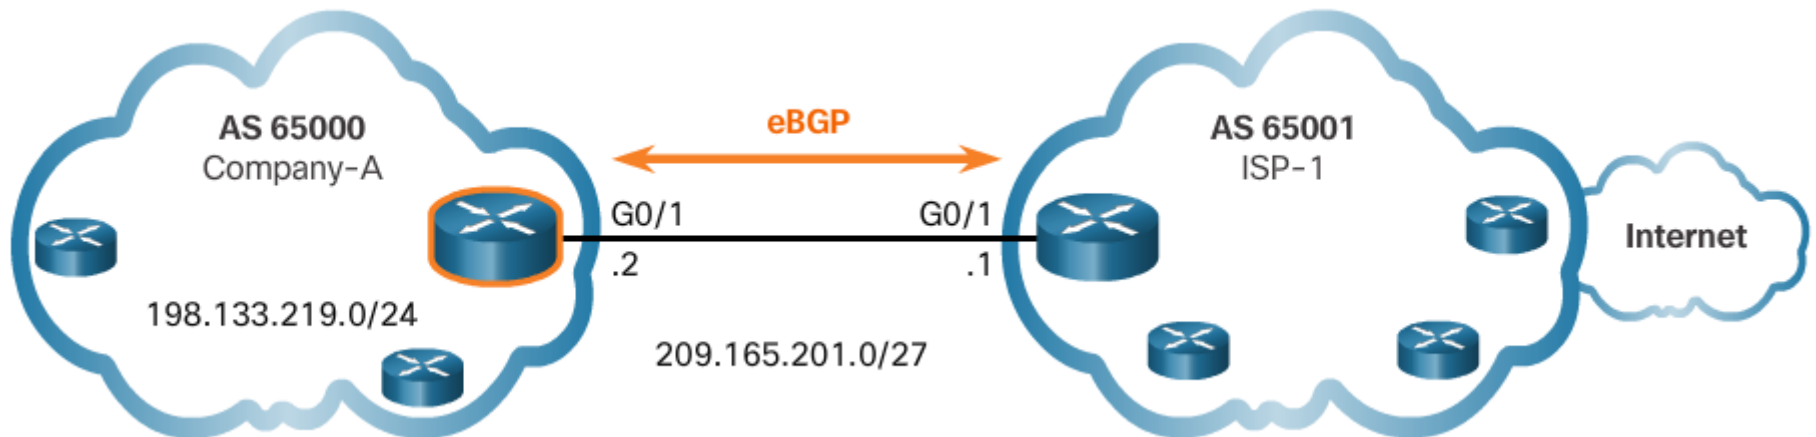





## 3.6 Chapter Summary



Cisco | Networking Academy®  
Mind Wide Open™



## Chapter Summary

# Summary

- Broadband transmission is provided by a wide range of technologies, including DSL, fiber-to-the-home, coaxial cable systems, wireless, and satellite. This transmission requires additional components at the home end and at the corporate end. Broadband wireless solutions include municipal Wi-Fi, cellular/mobile, and satellite Internet. Municipal Wi-Fi mesh networks are not widely deployed. Cellular/mobile coverage can be limited and bandwidth can be an issue. Satellite Internet is relatively expensive and limited, but it may be the only method to provide access.
- If multiple broadband connections are available to a particular location, a cost-benefit analysis should be performed to determine the best solution. The best solution may be to connect to multiple service providers to provide redundancy and reliability.
- PPPoE is a popular data link protocol for connecting remote networks to their ISPs. PPPoE provides the flexibility of PPP and the convenience of Ethernet.



## Chapter Summary

# Summary Continued

- VPNs are used to create a secure end-to-end private network connection over a third party network, such as the Internet. GRE is a basic, non-secure site-to-site VPN tunneling protocol that can encapsulate a wide variety of protocol packet types inside IP tunnels, thus allowing an organization to deliver other protocols through an IP-based WAN. Today it is primarily used to deliver IP multicast traffic or IPv6 traffic over an IPv4 unicast-only connection.
- BGP is the routing protocol implemented between autonomous systems. Three basic design options for eBGP are as follows:
  - The ISP advertises a default route only to the customer
  - The ISP advertises a default route and all of its routes to the customer.
  - The ISP advertises all Internet routes to the customer.
- Implementing eBGP in a single-homed network only requires a few commands.

# Cisco | Networking Academy<sup>®</sup>

Mind Wide Open<sup>™</sup>

